


Wireless Camera Kit

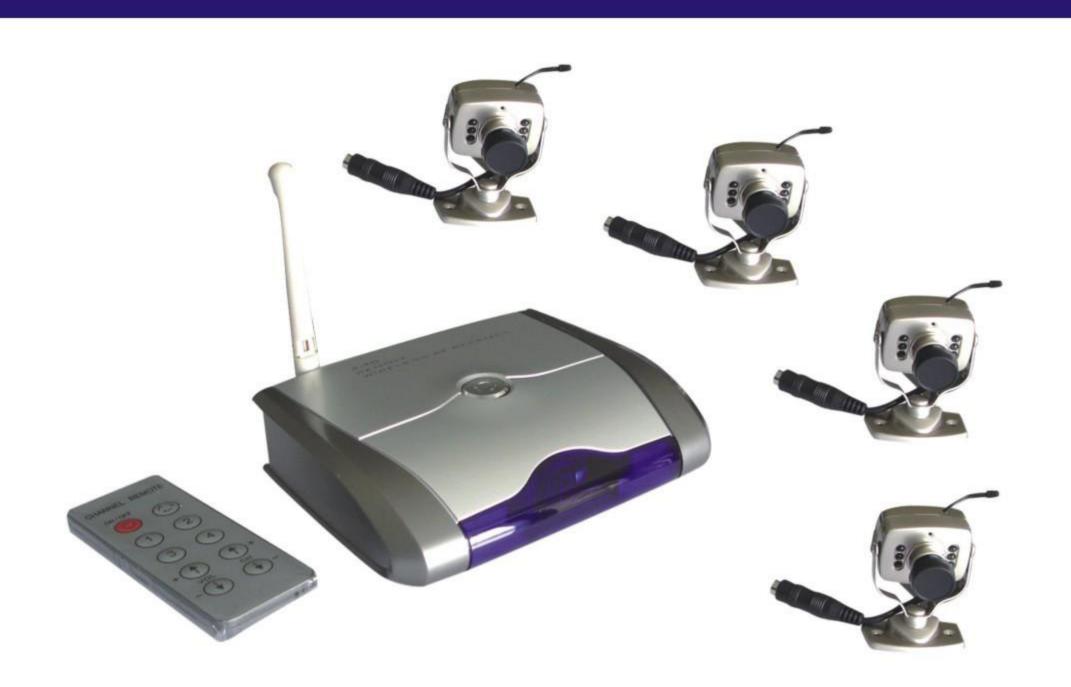

Product Function

- 2.4 G locked frequency transmitter and receiver
- Open transmission distance is 100 m in ideal conditions
- The receiver also has the infrared remote control
- It can output two lines of audio and video signals simultaneously
- Output can be displayed on TV, monitor or LCD TV and so on
- The delay time to switch automatically between the cameras can be set for 20 sec.

General Usage

The product is compact and diaphanous. It is convenient to take and use anywhere. It could be used in the supermarket, marketplace, shops, offices, residence etc. to monitor the places.

Specification:

Model	Parameters
Image Sensor	1/4" Sharp CCD
Validity Pixel	PAL: 512×582/NTSC: 512×492
Horizontal Definition	380line
Visual Angle	60℃
Minimum illumination	1Lux/F1.2
Frequency	C H1: 2.414GHz C H2: 2.432GHz
	C H3: 2.450GHz C H4: 2.468GHz
Transmission Power	20mW
Open Transmission Distance	100M
Power	DC12V/500mA
Work Temperature	-10~+50℃
Size	46×42×60mm
Weight	115g



USB Portable DVR for Desktop*
(Metal Case)

BSD STATE OF THE PARTY OF THE P

USB Portable DVR for Laptop*
(Plastic Case)

FEATURES

- 4 channels video input in one card, the maximum display/recording rate is 25 fps under PAL format, and 30 fps under NTSC format
- 4 screen display modes are available
- Multi alarm triggering method: sensor, motion, video loss, and HDD space shortage
- Support schedule recording mode, recycling recording method also available
- MPEG4 video compression format, 5 level recording quality options available and the recording frame rate range from 1 to 30 fps adjustable for each channel
- Support multi-channel playback, searching by time/date and recording events, images can be zoom/capture/save/print/backup
- Support remote surveillance and PTZ control through web browser, support dynamic domain name
- Remote playback function
- Configurable auto reboot function for preventing PC deadlock

Importers and Exporters :

Worldwide Technologies

Business Partner

^{*} Optional